

PRODUCT SUMMARY

The HL5867 is an ultra-broadband, thermally-compensated linear amplifier that demonstrates exceptional gain flatness over a typical bandwidth of 35 kHz to 30 GHz.

The HL5867 is optimized as a data driver to amplify signals with a minimum amount of eye distortion. This is ideal for use as a linear gain block in applications such as fiber optic receiver channels or PAM4 signaling up to 32 Gbps.

DEPLOYMENT NOTES

All specifications contained herein are typical unless otherwise noted.

S-PARAMETERS

S-parameters files are available on our website.

AVAILABLE OPTIONS

Connector size and configuration must be specified from the available options:

- 24, 2.4 mm connectors
- 29, 2.92 mm connectors

- JP, jack in, plug out
- PJ, plug in, jack out
- PP, plug in & out
- JJ, jack in & out

Standard configuration is
2.92 mm jack in / plug out
(opt. -29-JP)

Other configurations are available at additional cost:

HL5867 Broadband Linear Amplifier (30 GHz)



Key Features and Technical Specifications¹

Bandwidth (3 dB)	35 kHz to 30 GHz
Small Signal Gain	13 dB See Fig. 1
Amplitude Deviation	$\pm 2.5\%$, 0-60° C See Fig. 3
XP Deviation	$\pm 2\%$, 0-60° C See Fig. 4
Return Loss	12 dB, input 12 dB, output See Fig. 2
Max Power Out (-1 dB gain comp.)	12.5 dBm
Dimensions	55.9 x 33.7 x 10.2 mm (opt. -29-JJ) 2.2" x 1.326" x 0.400"
Weight	25 g (0.88 oz)
Temperature Limits	0° to +60° C, operating
RoHS Compliant	Yes, assembled with lead-free solder
REACH Compliant	Yes
Warranty	1 year, see website


NOTE 1 - The specifications in this table are typical based on configuration -29-JJ. Full specifications, are available on Page 2 of this datasheet.

DEVICE PORT ASSIGNMENTS


For the purposes of this datasheet, the below port assignments are used.

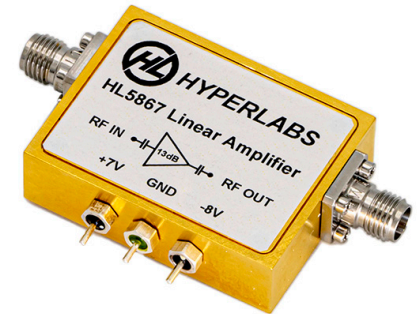

HL5867, option -29-JJ shown

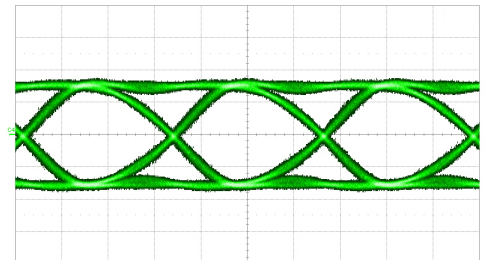

28 Gbps PRBS31 pattern on the RF Out port of HL5867-29-JJ; see also Figs. 7-12

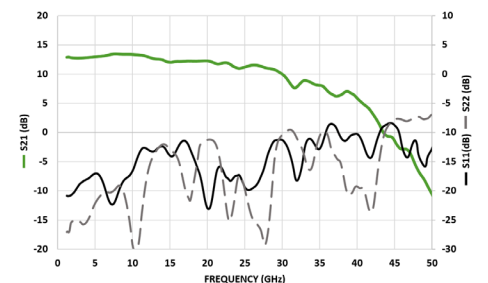

Typical Small Signal Gain and Return Loss of HL5867-29-JJ; see also Figs. 1-2

HL5867 Full Specifications

Parameter	Conditions	Minimum	Typical	Maximum	Comments
Upper 3 dB Frequency	$-30 \text{ dBm} \leq P_{in} \leq -5 \text{ dBm}$	27 GHz	30 GHz		3 dB roll-off point, relative relative to small signal gain
Lower 3 dB Frequency			35 kHz		3 dB roll-off point,
Small Signal Gain	Input signal = -30 dBm	12 dB	13 dB	14 dB	Avg. from 35 MHz to 2 GHz
Gain Flatness			$\pm 0.5 \text{ dB}$		50 MHz < f < 15 GHz
Deviation from Linear Phase			$\pm 7 \text{ deg.}$		50 MHz < f < 20 GHz
Amplitude Deviation			$\pm 2.5\%$, 0-60° C		
XP Deviation			$\pm 2\%$, 0-60° C		
Return Loss, Input			12 dB		50 MHz < f < 30 GHz
Return Loss, Output			12 dB		50 MHz < f < 30 GHz
Group Delay			303 ps		
Input Referred Noise Voltage			105 $\mu\text{V rms}$		20 GHz broadband measurement
Noise Figure			5 dB	5.5 dB	f = 1 GHz
Max Power Out (1 dB gain compression)			12.5 dBm		
Impedance			50 Ω		
Supply Voltage (+)		+6.5 V_{DC}	+7 V_{DC}	+10 V_{DC}	
Supply Voltage (-)		-8.5 V_{DC}	-8 V_{DC}	-7.5 V_{DC}	
Supply Current (+)			110 mA		
Supply Current (-)			40 mA		
Power Dissipation			1.1 W	2 W	

HL5867 Full Specifications (continued)

Parameter	Conditions	Minimum	Typical	Maximum	Comments
Maximum Allowed Input				15 dBm	Input damage threshold
Input DC Bias Range		-20 V _{DC}		+20 V _{DC}	Input is AC coupled
Output DC Bias Range		-20 V _{DC}		+20 V _{DC}	Output is AC coupled
Operating Temperature		0° C		60° C	Ambient temperature
Storage Temperature		-40° C		125° C	
Polarity	Inverting				
Coupling	AC, input and output				
RF Connectors	2.92 mm (opt. -29); specify jack or plug for both input and output ports 2.4 mm (opt. -24); specify jack or plug for both input and output ports <i>Standard configuration is 2.92 mm jack/plug (opt. -29-JP)</i> <i>Other configurations at additional cost</i>				
DC Connector	Solder pins				
Dimensions (W x D x H)	55.9 x 33.7 x 10.2 mm (opt. -29-JJ) 2.2" x 1.325" x 0.400"				
Weight	25 g. (0.88 oz.)				
RoHS Compliant	Yes, assembled with lead-free solder				
REACH Compliant	Yes				
Warranty	1 year, repair or replacement; see website for details				

NOTE - All specifications are based on test results using connector configuration (-29-JJ, 2.92 mm jack/jack). Specifications may vary slightly for other configurations.

HL5867 Performance Characteristics

Figures 1-5 show the typical performance characteristics of the HL5867-29-JJ

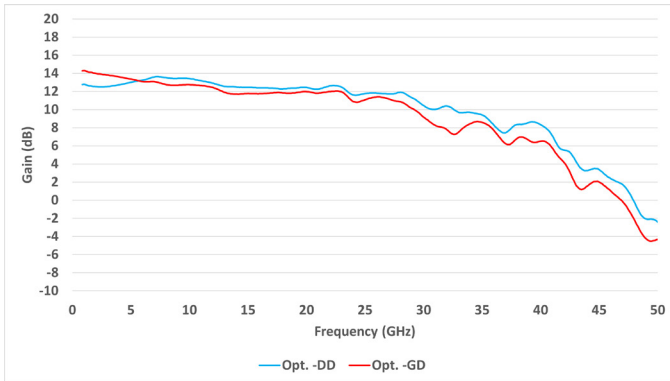


Fig. 1: HL5867 Small Signal Gain (opt. -29-JJ)

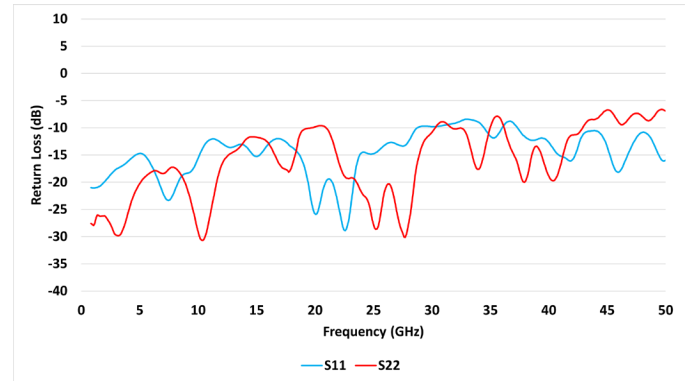


Fig. 2: HL5867 Return Loss (opt. -29-JJ)

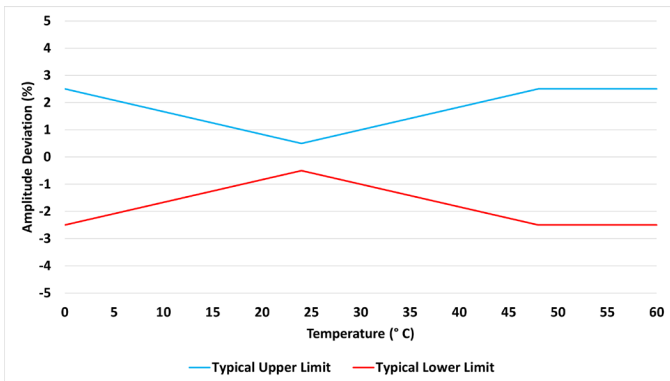


Fig. 3: HL5867 Amplitude Deviation (all options)

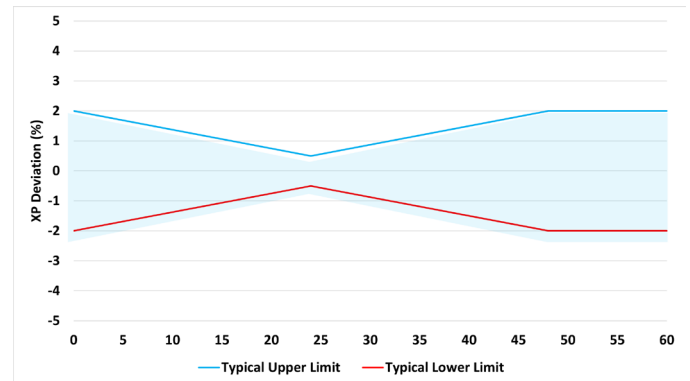


Fig. 4: HL5867 Crossing Point Deviation (all options)

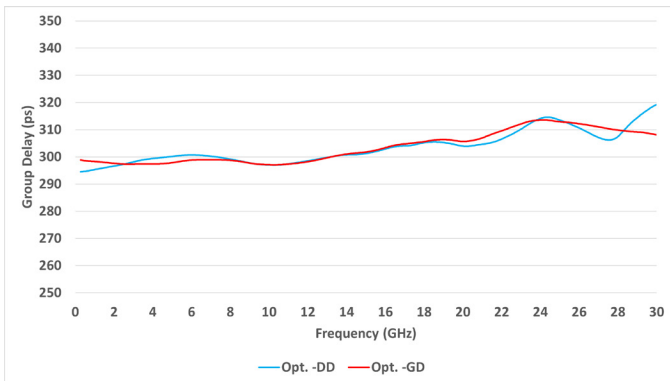


Fig. 5: HL5867 Group Delay (opt. -29-JJ)

HL5867 Eye Diagrams

The HL5867 is optimized as a data driver and outputs exceptionally clean eyes. *Figure 6* shows an input signal with 250 mV amplitude at 85 mV/div. Figures 7-11 show output eyes generated from a variety of input patterns. All have an amplitude of 360 mV/div

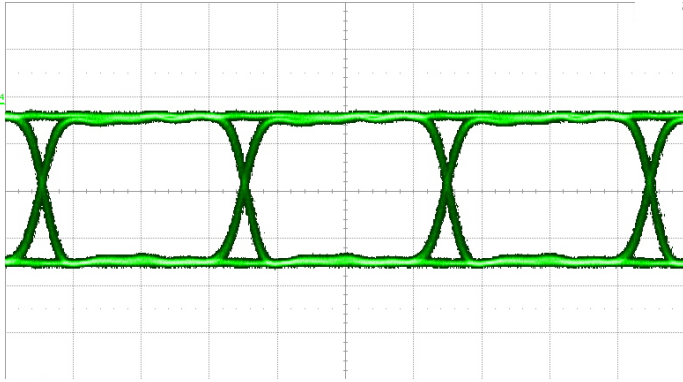


Fig. 6: 12.5 Gbps PRBS31 pattern on RF In

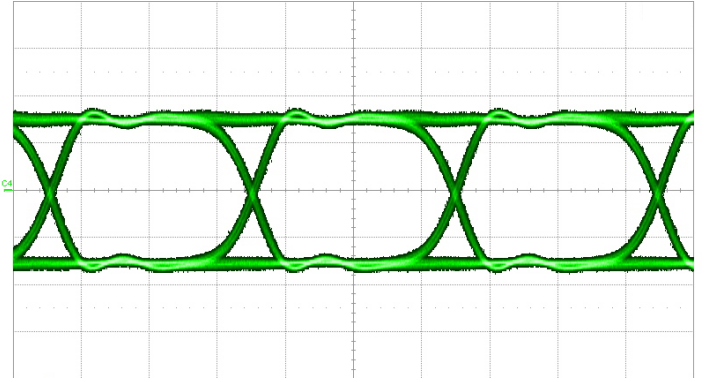


Fig. 7: 12.5 Gbps PRBS31 pattern on RF Out

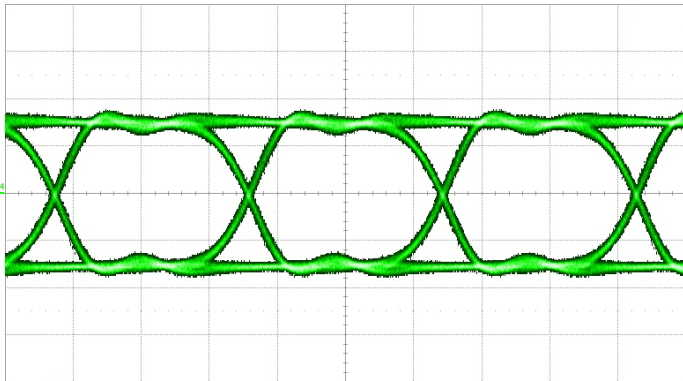


Fig. 8: 16 Gbps PRBS31 pattern on RF Out

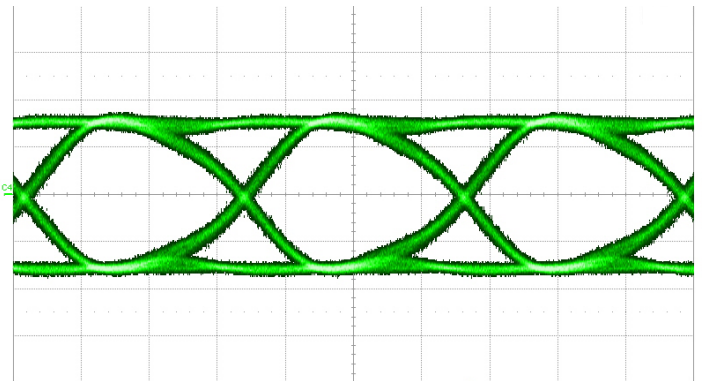


Fig. 9: 25 Gbps PRBS31 pattern on RF Out

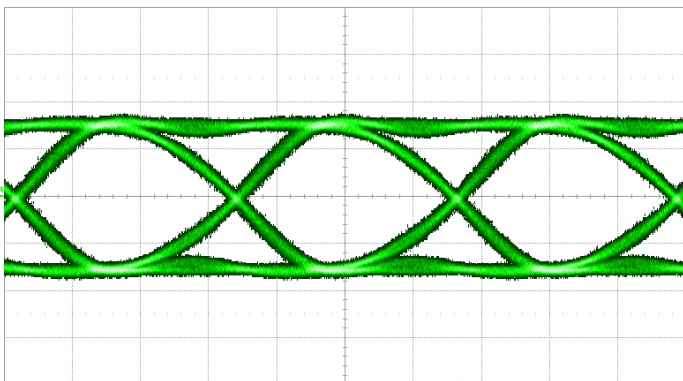


Fig. 10: 28 Gbps PRBS31 pattern on RF Out

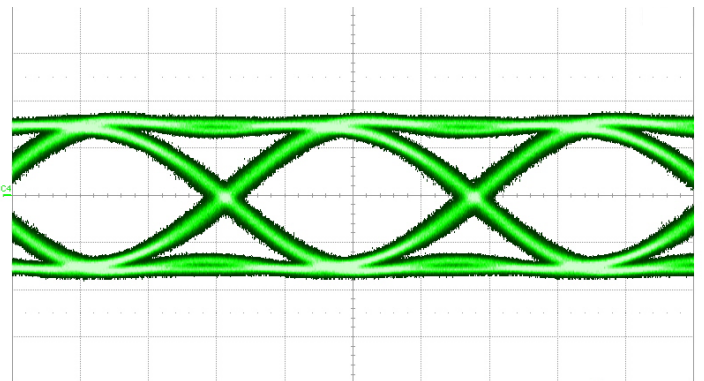


Fig. 11: 32 Gbps PRBS31 pattern on RF Out

HL5867 Dimensional Drawing

Figure 12 shows a mechanical drawing of an HL5867, option -29-JJ. Unless otherwise noted, all units are in inches.

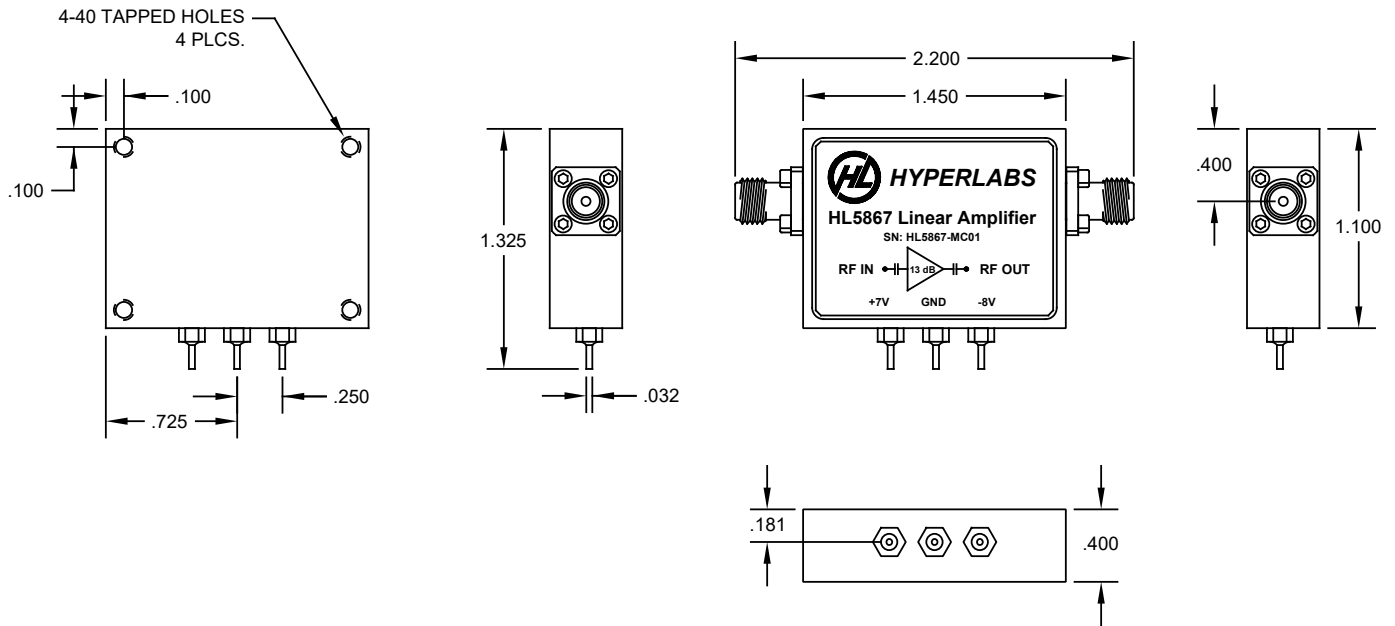


Fig. 12: HL5867 mechanical drawing (opt. -29-JJ), inches