

HL954x Series Bias Tees (50 kHz to 67 GHz, 400 mA)

Features and Technical Specifications¹ (HL9547 shown)

PRODUCT SUMMARY

The HL954x Series are ultra-broadband bias tees with a maximum insertion loss of 1.8 dB throughout the specified bandwidth range.

The HL954x blocks any existing DC signal and allows for the insertion of a DC bias current into a circuit with minimal perturbation of the impedance of a 50 ohm transmission line.

These devices can be used for biasing amplifiers, lasers, optical modulators, and other devices.

Applications include 112 Gbps PAM4 communications systems, optical communication systems, high-speed data systems, level shifting, cascading, and interfacing between devices with incompatible DC operating points.

MODELS & OPTIONS

The following models are available:

- HL9544**, 40 GHz
- HL9545**, 50 GHz
- HL9547**, 67 GHz

The following options are available:

- M**, matched pair
- U**, unmatched part(s)

- 11**, 11 V breakdown
- 30**, 30 V breakdown


- JJ**, jack AC, AC+DC
- JP**, jack AC, plug AC+DC
- PJ**, plug AC, jack AC+DC
- PP**, plug AC, AC+DC

Bandwidth	50 kHz to > 67 GHz (opt. -11) 75 kHz to > 67 GHz (opt. -30)
Insertion Loss	1.8 dB max, 1 MHz to 67 GHz, (opt. -JJ) See Fig. 1
Return Loss	15 dB $f \leq 35$ GHz, all options 10 dB $f > 35$ GHz, all options See Fig. 3
Amplitude Match (opt. -M only)	± 0.1 dB, $f \leq 67$ GHz, all options See Fig. 5
Phase Match (opt. -M only)	$\pm 4^\circ$, $f = 40$ GHz
Breakdown Voltage	11 V, max (opt. -11) 30 V, max (opt. -30)
Maximum Current	400mA
Group Delay	≈ 110 ps ± 10 ps ripples, all options See Fig. 4
Rise Time (10-90%)	5 ps, all options
Connectors (AC / AC+DC)	1.85 mm, jack/jack (opt. -JJ) 1.85 mm, jack/plug (opt. -JP) 1.85 mm, plug/jack (opt. -PJ) 1.85 mm, plug/plug (opt. -PP)
Temperature Limits	-40° to +70° C, operating
RoHS Compliant	Yes, assembled with lead-free solder
REACH Compliant	Yes
Warranty	1 year, see website


NOTE 1 - Unless otherwise noted, the specifications in this table are typical for Model Number HL9547. Full specifications for this and related models are available on Page 2 of this datasheet.



HL9547, Option -M-JP shown

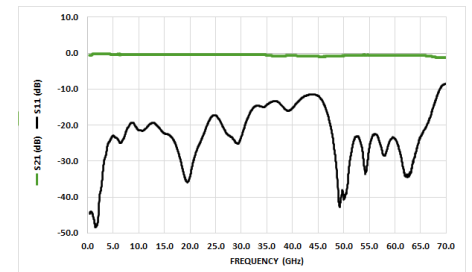

Typical HL9547 Insertion and Return Loss

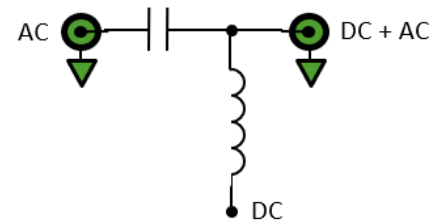

HL954x Schematic and Port Assignments

HL954x Full Specifications

Parameter	HL9544	HL9545	HL9547	Comments
Upper Frequency Limit	> 40 GHz	> 50 GHz	> 67 GHz	3 dB roll-off point, relative to nominal insertion loss
Lower Frequency Limit See Fig. 2	50 kHz (opt. -11) 75 kHz (opt. -30)			3 dB roll-off point
Maximum Current	400 mA			
Breakdown Voltage	11 V, max (opt. -11) 30 V, max (opt. -30)			
Insertion Loss See Fig. 1	1.5 dB max, 1 MHz ≤ f ≤ 40 GHz	1.5 dB max, 1 MHz ≤ f ≤ 50 GHz	1.8 dB max, 1 MHz ≤ f ≤ 67 GHz	
Return Loss See Fig. 3	15 dB, f ≤ 35 GHz 10 dB, f > 35 GHz			Typical, within specified operating frequency
Amplitude Match See Fig. 5	± 0.1 dB, (opt. -M)			Typical, opt. -M
Phase Match	± 4°, f = 40 GHz (opt. -M)			Typical, opt. -M
Rise Time	8.75 ps	7 ps	5 ps	Typical
Group Delay See Fig. 4	107 ps ± 10 ps ripple	107 ps ± 10 ps ripple	110 ps ± 10 ps ripple	All options
Impedance	50 Ω			Input and Output
DC Resistance	1.4 Ω			DC to AC+DC
Connectors	2.92 mm, jack-jack 2.92 mm, jack-plug 2.92 mm, plug-jack 2.92 mm, plug-plug	2.4 mm, jack-jack 2.4 mm, jack-plug 2.4 mm, plug-jack 2.4 mm, plug-plug	1.85 mm, jack-jack 1.85 mm, jack-plug 1.85 mm, plug-jack 1.85 mm, plug-plug	According to specified option -JJ, -JP, -PJ, or -PP
Dimensions (W x D x H)	1.95" x 1.30" x 0.53" 49.53 x 33.02 x 13.46 mm			Package including connectors
Weight	24 g (0.85 oz.)			
Operating Temperature	-40° to +70° C			Case temperature
RoHS Compliant	Yes, assembled with lead-free solder			
REACH Compliant	Yes			
Warranty	1 year, repair or replacement; see website for details			



HL954x Bandwidth and Insertion Loss

Figure 1 shows the insertion loss and bandwidth of the HL9547 from 10 MHz to 67 GHz.

Figure 2 shows the low-frequency response of this same configuration to 100 Hz.

Other models show similar performance within their respective specified bandwidths.

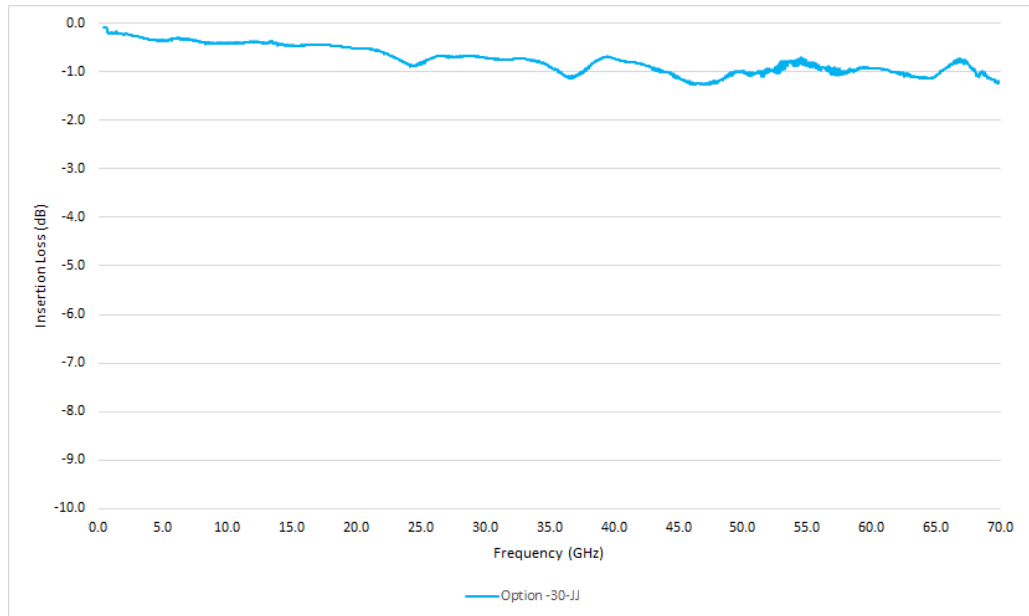


Figure 1: Typical HL9547 Bandwidth and Insertion Loss

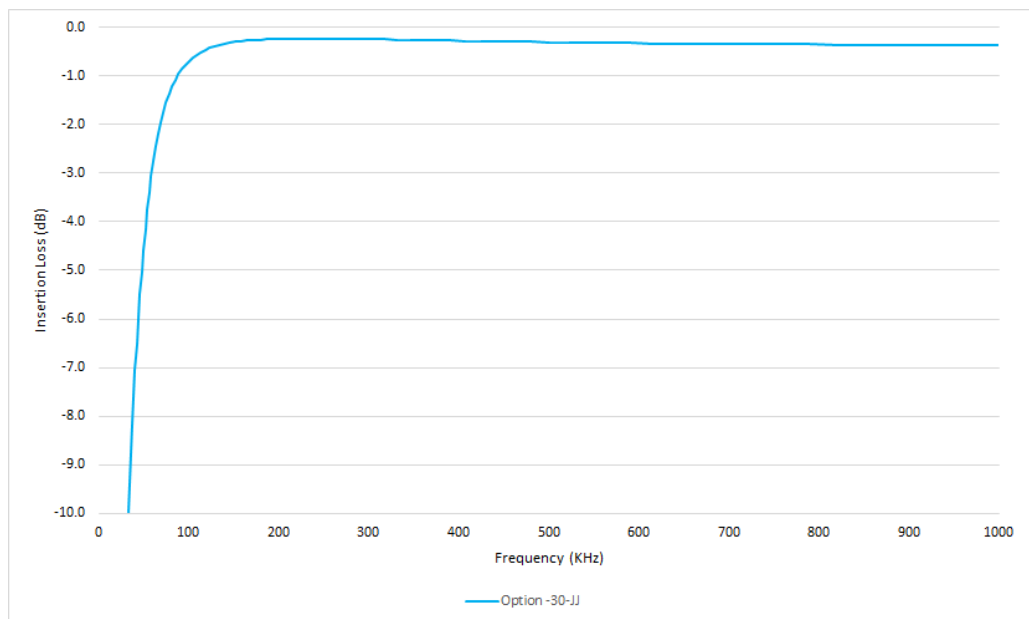


Figure 2: Typical HL9547 Low-frequency Performance (opt. -30)

HL954x Return Loss and Group Delay

Figure 3 shows Return Loss and Figure 4 shows the Group Delay on a typical HL9547 from 10 MHz to 67 GHz.

Other models show similar performance within their respective specified bandwidths.

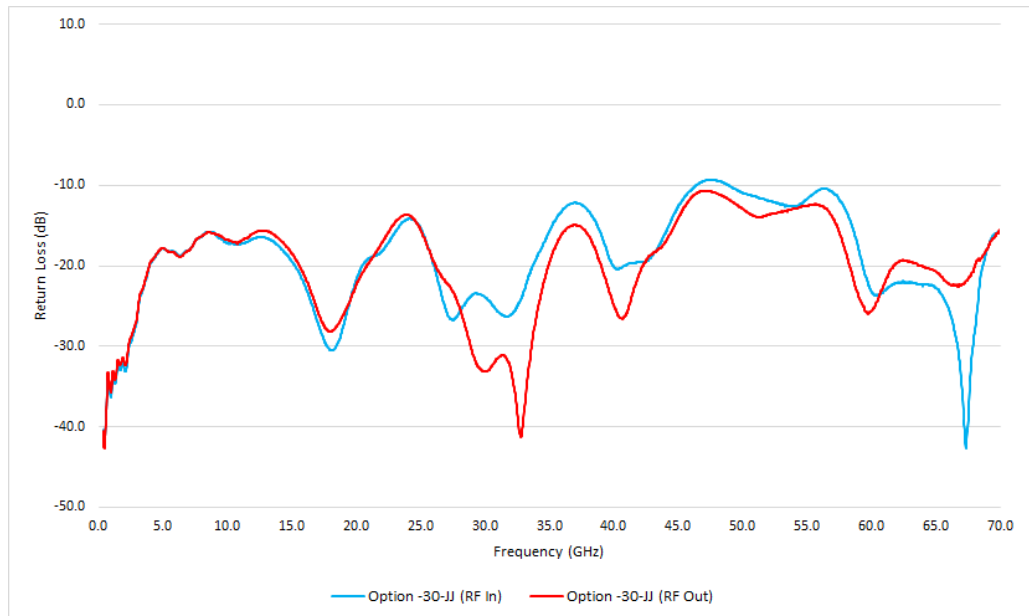


Figure 3: Typical HL9547 Return Loss

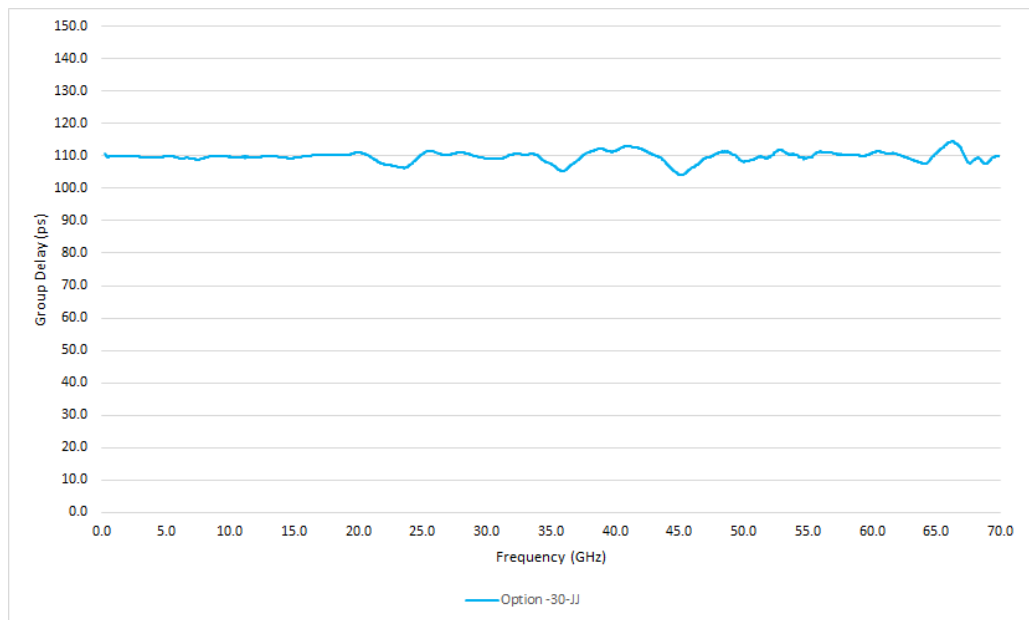


Figure 4: Typical HL9547 Group Delay

HL954x Matching

Figure 5 shows the typical amplitude match between a matched pair of HL9547 devices from 10 MHz to 67 GHz.

Other models show similar performance within their respective specified bandwidths.

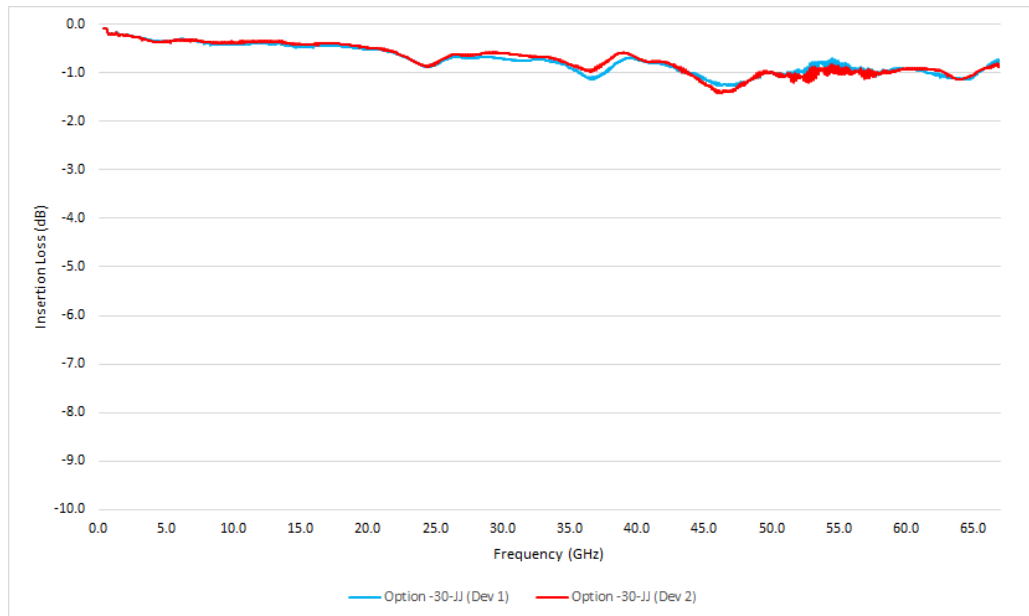


Figure 5: Typical HL9547 Amplitude Matching (opt. -M)

HL957x Eye Diagrams

The eye diagrams in Figures 6-7 show a 32 Gbps PRBS31 pattern passed through an HL9547 (opt. -11).

All plots have an input signal amplitude of 395 mV and are shown at 89 mV/div.

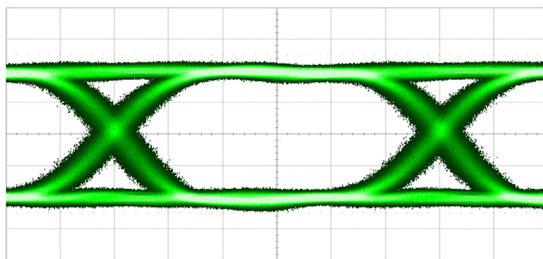


Figure 6: HL9547 32 Gbps PRBS 31, RF Input

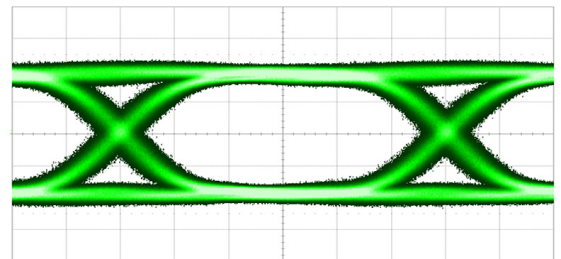


Figure 7: HL9547 32 Gbps PRBS 31, RF Output

HL954x Dimensional Drawing

Figure 8 shows a mechanical drawing of an HL9547 (opt. -JP). Unless otherwise noted, all units are in inches. See page 2 for full dimensions.

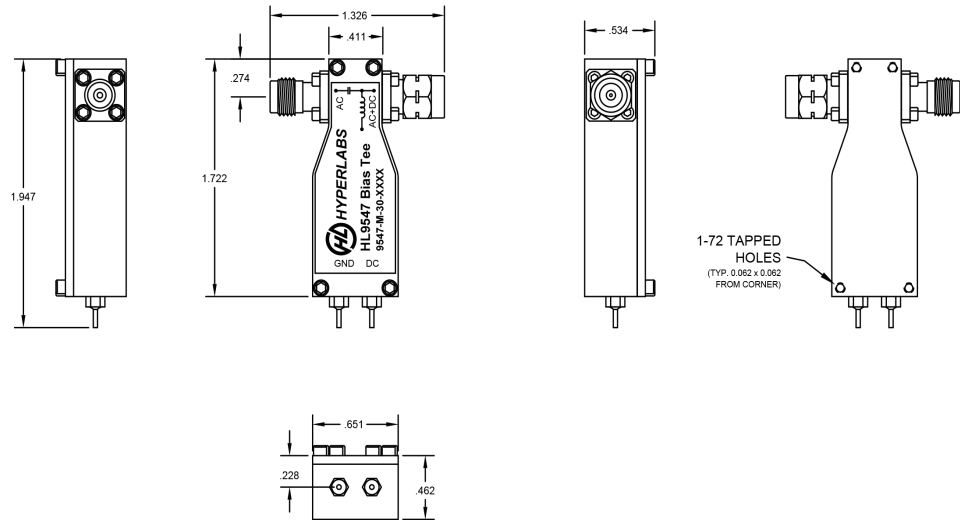


Fig 8: HL9547 Mechanical Drawing